
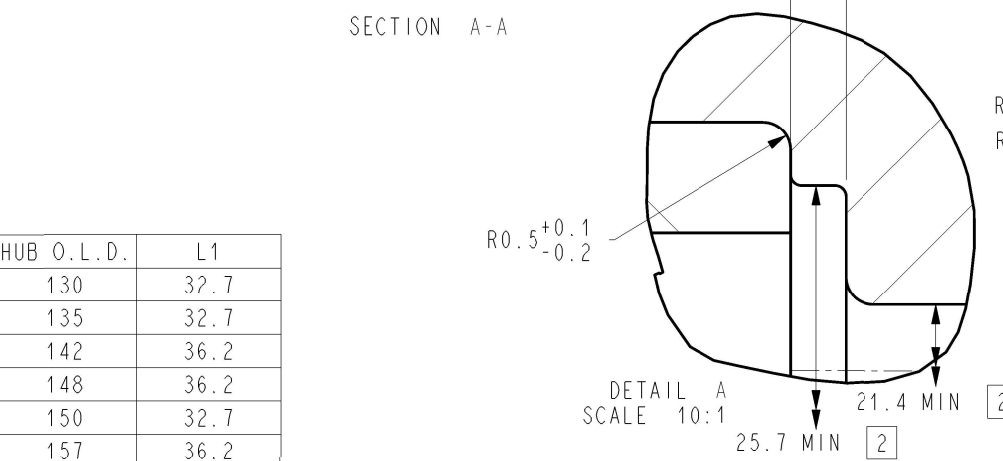
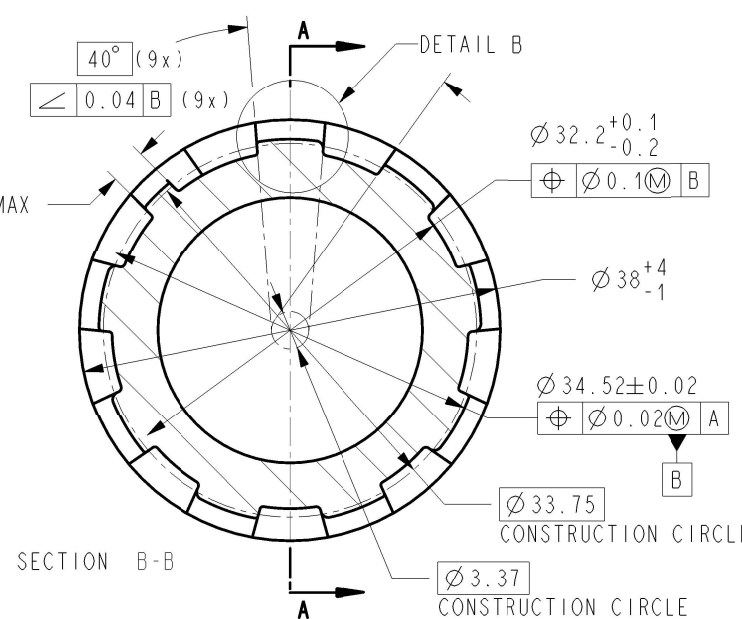


REV	RESP ENG	REVISION RECORD
A	APR/12	INITIAL REVISION - BASED ON SRAM DRIVER BODY STANDARD XD
B	AVONEND	ADD: SHEET 2 FOR DRIVETRAIN CLEARANCE. CHANGE: NAME TO XD-SLIM (SHEET1, G3 & G10) WAS XDH.

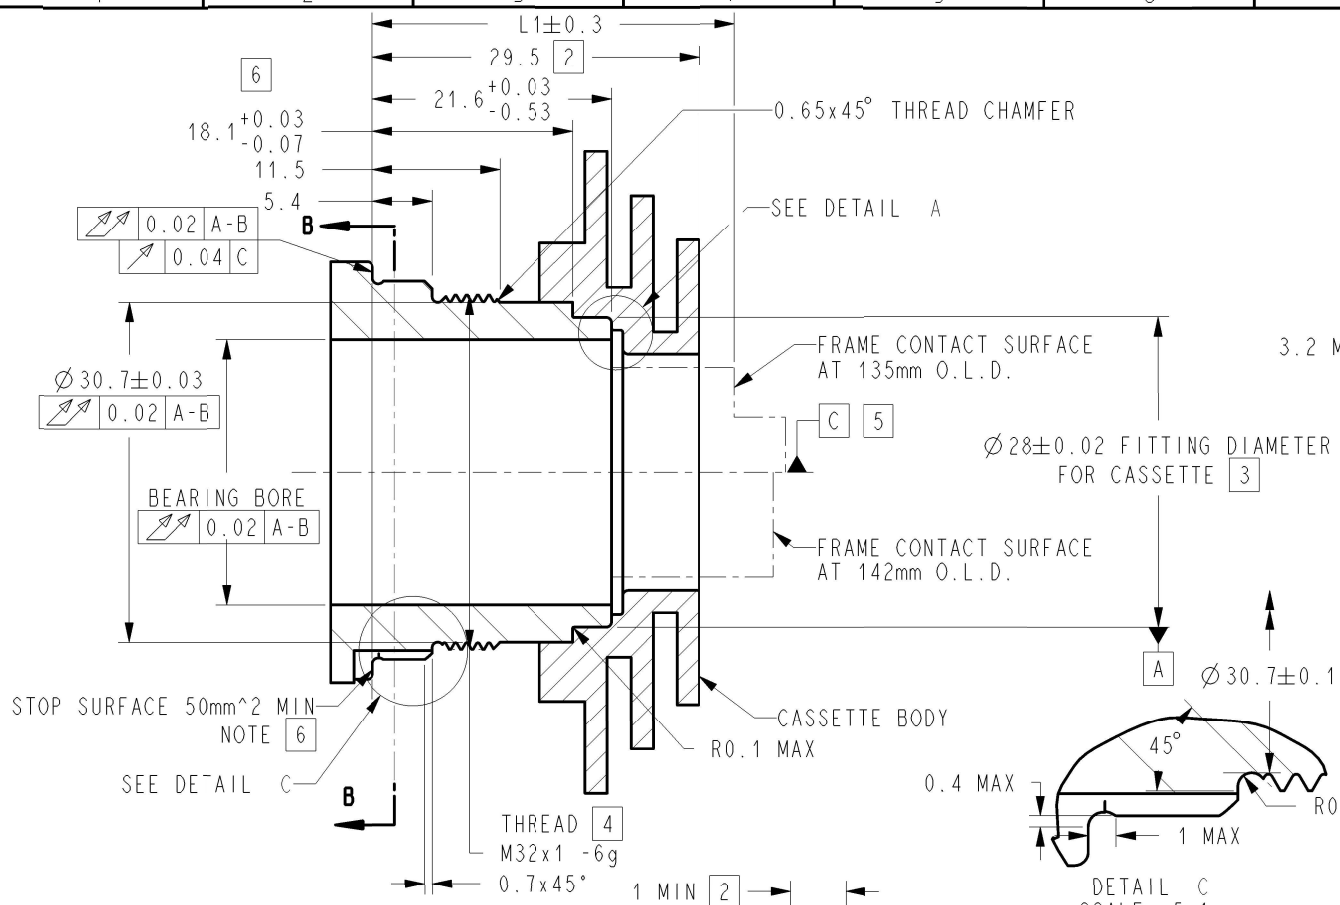


HUB O.L.D.	L1
130	32.7
135	32.7
142	36.2
148	36.2
150	32.7
157	36.2

SRAM XD TECHNOLOGY MAY ONLY BE USED WITH AN APPROVED LICENSE AGREEMENT
DRIVER BODY MUST BE MARKED WITH XD-SLIM LOGO
VISIT WWW.XDDRIVERBODY.COM

- NOTES:
- GENERAL SURFACE FINISH: $Ra1.6$ MAX
 - DIMENSION OF CASSETTE BODY
 - SURFACE MAY BE BEARING OUTER RACE OUTER DIAMETER
 - THREAD PER ISO965 OR DIN 13-22
 - DATUM [C] IS ROTATIONAL AXIS OF COMPLETE HUB ASSEMBLY IN INSTALLED STATE
 - DRIVER BODY STOP SURFACE MOVED 7.9MM OUTBOARD COMPARED TO SRAM XD DB

ALL DIMENSIONS ARE mm	GEOMETRIC DIMENSIONING AND TOLERANCING TO BE INTERPRETED PER ASME Y14.5-2009
THIRD ANGLE PROJECTION	[KC] OR [KC] INDICATES QUALITY IS SENSITIVE TO VARIATION FROM TARGET
MASS (g)	UNTOLERANCED LENGTH DIMENSIONS (mm)
MATERIAL	LENGTH DIMENSIONS TOLERANCE
	from 0.5 up to 6 ± 0.1
	over 6 up to 30 ± 0.2
	over 30 up to 120 ± 0.3
	over 120 up to 400 ± 0.5
	UNTOLERANCED ANGLE DIMENSIONS
	± 2°

FORMAT: A3	SCALE: 2:1	SHEET: 1 / 2
LIFECYCLE STATUS	Released	SRAM
DRAWING NAME / DESCRIPTION	SRAM DRIVER BODY STANDARD XD SLIM	CONFIDENTIAL - THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SRAM CORPORATION AND MAY NOT BE DISCLOSED WITHOUT PERMISSION.
DRAWING NUMBER	90-2415-210-000	VERSION
		B.5

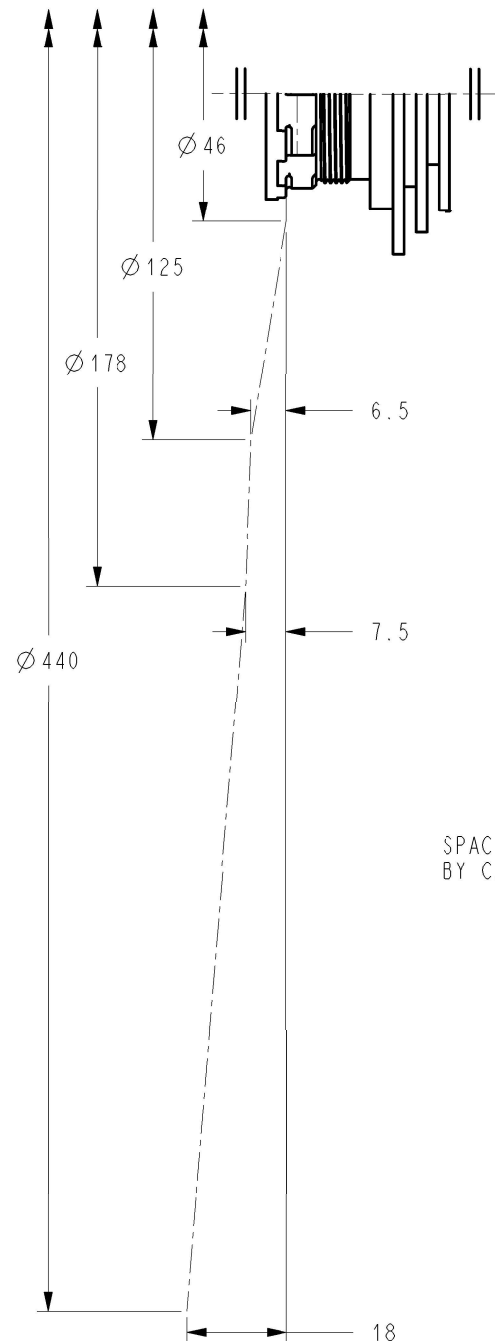

SPACE OUTBOARD OF SPECIFIED BORDER OCCUPIED
BY CASSETTE AND REAR DERAILLEUR IN STATIC CONDITION

SRAM XD TECHNOLOGY MAY ONLY BE USED WITH AN APPROVED LICENSE AGREEMENT
DRIVER BODY MUST BE MARKED WITH XD-SLIM LOGO
VISIT WWW.XDDRIVERBODY.COM

FORMAT: A3	SCALE: 2:1	SHEET: 2 / 2
LIFECYCLE STATUS	SRAM® CONFIDENTIAL - THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SRAM CORPORATION AND MAY NOT BE DISCLOSED WITHOUT PERMISSION.	
Released		
DRAWING NAME / DESCRIPTION		
SRAM DRIVER BODY STANDARD XD SLIM		
DRAWING NUMBER		VERSION
90-2415-210-000		B.5